


## AMBIANCE® LANDSCAPE LIGHTING SYSTEM

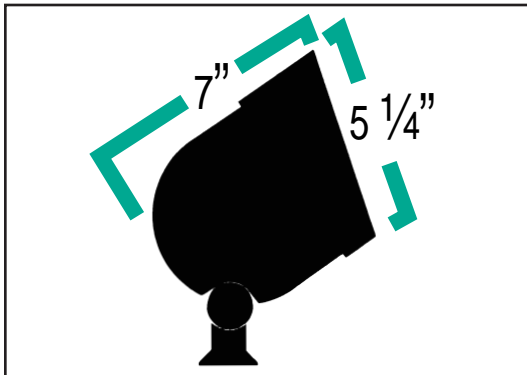

### 9326-12 BLACK 9326-40 CHESTNUT

#### LAMP SELECTION:

- One 12V PAR 36 screw terminal halogen lamp 50w max, (not included).

#### DIMENSIONS:

- Height: 7" • Diameter: 5 1/4"

#### TYPICAL APPLICATIONS:

- Highlight or focus on object (i.e. tree, statue)
- Uplighting tree/shrub
- Security lighting
- Moonlighting
- Spotighting
- Downlighting

#### PRODUCT FEATURES:

- Directional spot lights provide optimum light output for accent and security lighting.
- Used to achieve dramatic effects such as: downlighting, uplighting, moonlighting, and spotighting.
- Angular silicone glare shield holds a tempered borosilicate glass lens for water resistance and affords easy lamp replacement with no screws or tools.
- Fully adjustable swivel base easily mounts to walls, fences, and other solid surfaces or attaches to a 1/2" threaded pipe or polycarbonate stake (included).
- Large swivel with with internal teeth and stainless steel screw allows for precise aiming.
- Constructed of rugged die-cast aluminum with a powder coat finish.
- Corrosion resistant finish is guaranteed for ten years.
- Fixtures supplied with 36" 16/2 AWG cable and connector for flexible electrical connection.
- Swivel, rotate, and aim in any direction.
- Well suited for commercial and residential applications.
- PAR 36 reflector lamp maximizes light output (not included).
- Halogen lamps offer high intensity, quality white light, and long life.
- Choose from various beam spreads to suit any application.

#### GENERAL TECHNICAL INFORMATION:

- Use of other manufacturers components will void the Sea Gull Lighting warranty, UL listing, and create a potential safety hazard.
- UL and CUL listed for wet locations 12V.

# 9326 TECHNICAL INFORMATION

## INSTALLATION AND IMPORTANT SAFETY INSTRUCTIONS

### FOR YOUR SAFETY

**WARNING:** Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.

**RISK OR FIRE:** Exceeding maximum wattage may result in overheating conductors. Read instructions carefully. If you are unclear as to how to proceed, consult a qualified electrician.

**WARNING:** Use of other manufacturers components will void warranty, U.L. listing, and create a potential safety hazard.



**Lighted lamp is HOT!**

**WARNING: TO REDUCE THE RISK OF FIRE OR INJURY TO PERSONS:**

1. Turn off/unplug and allow to cool before replacing lamp.
2. Lamp gets HOT quickly! Contact only switch/plug when turning on.
3. Do not touch hot lens, guard, or housing.
4. Keep lamp away from materials that may burn.
5. Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
6. Do not operate the fixture with a missing or damaged shield.

## INSTALLATION

1. Attach lead connectors to lamp terminal screw (FIG. 1).
2. Press lamp assembly into groove in gasket and snap gasket onto housing (FIG. 2).

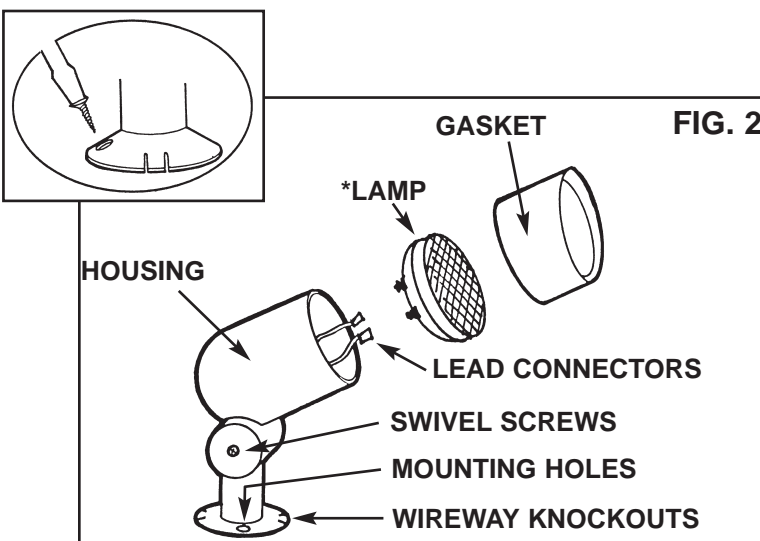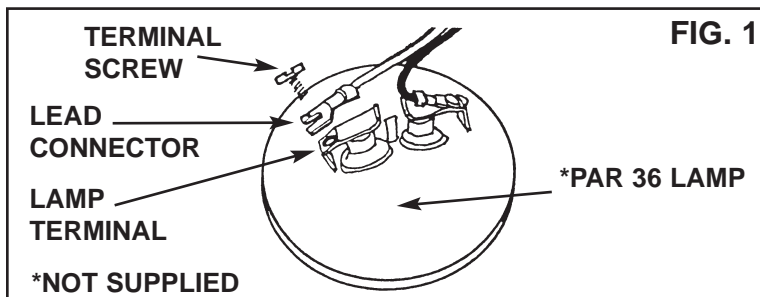

LAMP INFORMATION							Lamp data is based on manufacturers published information recalculated at approx. 12V.
CAT #	VOLTS	WATTS RATED	WATTS CONSUMED	LIFE (HOURS)	BEAM SPREAD	COLOR (TEMP°K)	
9765 (H)	12	50	50	4,000	NSP 15°	3,050	
9766 (H)	12	50	50	4,000	NFL 25°	3,050	
9767 (H)	12	50	50	4,000	FL 40°	3,050	

**DIMMING HALOGEN GREATLY REDUCES LAMP LIFE**

SEA GULL LIGHTING RESERVES THE RIGHT, AT ANY TIME TO MAKE CHANGES IN THE CONSTRUCTION AND DESIGN OF ANY PRODUCT WITHOUT NOTICE. THE CHANGES MAY BE NECESSARY BY LAW OR AVAILABILITY OF SUPPLIES.