


AMBIANCE®
ADDRESS LIGHT

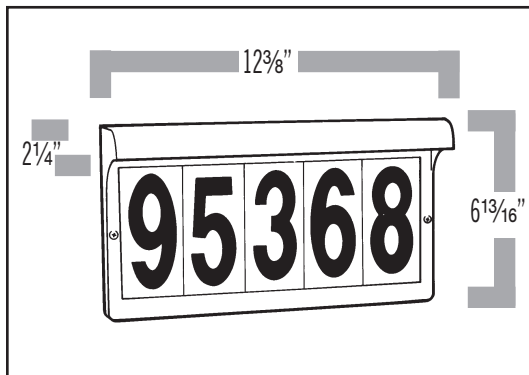

9600-12 BLACK
9600-15 WHITE
9600-26 SIENNA®

LAMP SELECTION:

- Two 12v T3¼ Wedge Base Xenon 5w. max, (included).

DIMENSIONS:

- Height: 6 13/16" • Extension: 2 1/4" • Width: 12 3/8"

TYPICAL APPLICATIONS:

- Residential

PRODUCT FEATURES:

- Rugged cast aluminum low voltage address light.
- Maximum visibility by day and night. Beefs-up security, speeds emergency response and deliveries.
- Supplied with two Xenon high intensity light bulbs, that generate over 16 lumens of pure white light and consume only 4.5 watts.
- Big 4" numbers of high impact polycarbonate for clear, precise readability from 100 feet away.
- Over 100,000 hours lamp life at 16 volts.
- Easy to install, may connect to doorbell transformer (16V max) using supplied terminal block.
- Innovative design deflects rain and debris.
- Polished aluminum reflector maximizes light output.
- Compact size: 6 13/16" H x 12 3/8" W x 2 1/4" D.
- Long lasting cast aluminum construction with polyester powdercoat paint finish protects against UV fading and resists cracking by garden chemicals and acid rain.
- **Number Tiles:** Individual house number tiles constructed of high impact, UV resistant, high heat polycarbonate. Scratch resistant black number on white tile. Select desired numbers or blank tiles and insert into frame.

GENERAL TECHNICAL INFORMATION:

- Serious risk of fire exists when mixing 12V lamps with 24V transformers.
- UL listed for wet locations 12V.

9600 TECHNICAL INFORMATION

INSTALLATION AND IMPORTANT SAFETY INSTRUCTIONS

FOR YOUR SAFETY

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE REMOVED OR THE CIRCUIT BREAKER OFF.

CAUTION: Address lights operate on low voltage (10-24 volts) only. Connecting this unit directly to household wiring (120 volts) may result in damage to unit, surrounding area and electrical shock.


Install Sea Gull NO. 9647, 10VA (Class 2) 16 Volt Transformer For The Power Source In Accordance With All Local And National Electrical Codes.

If address light is connected to existing doorbell transformer, the light will dim momentarily while the chime button is depressed.

1. Place desired number tiles (not included) into back of housing (housing holds five digits). Use two full blank tiles (9619) for three digit number or two one half blank tiles (9621) for four digit number.
2. Attach tile support strip to back of housing with two screws provided.
3. Run wires from transformer (not included) through hole in building surface and attach to terminal block on lamp / reflector assembly.
4. Slip lamp/reflector assembly into back of housing.
5. Attach housing assembly to surface with two screws provided through holes in front of housing.
6. Install ON/OFF switch, timer or photocell on 120 volt side of transformer or allow address light to operate continuously.


NOTE: Replace lamps with Sea Gull No. 9732 long life xenon for maximum brightness. Replace both lamps when one lamp burns out.

Average lamp life at 16 volts is 100,000 hours. Lamp life is dramatically reduced as voltage increases, (example; average lamp life at 24 volts is 8,000 hours).




LAMPS: T 3 1/4 WEDGE BASE 12V LAMPS

All glass wedge base lamps are designed for long life and severe operating conditions, including shock, vibration, heat, cold, moisture. With no metal base or soldered connections to loosen, break or corrode, these lamps will operate in high ambient temperatures. Xenon lamps offer long life, high intensity and white color similar to halogen.

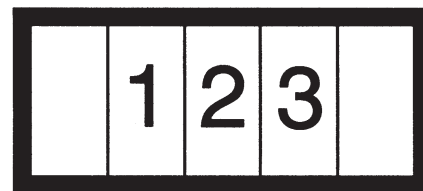

3 DIGIT NUMBER
WITH TWO FULL BLANK TILES

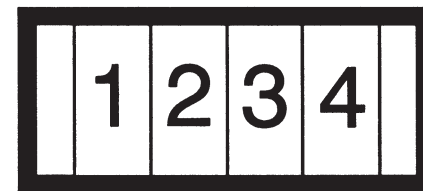

4 DIGIT NUMBER
WITH TWO 1/2 BLANK TILES

