


AMBIANCE®
LANDSCAPE LIGHTING SYSTEM

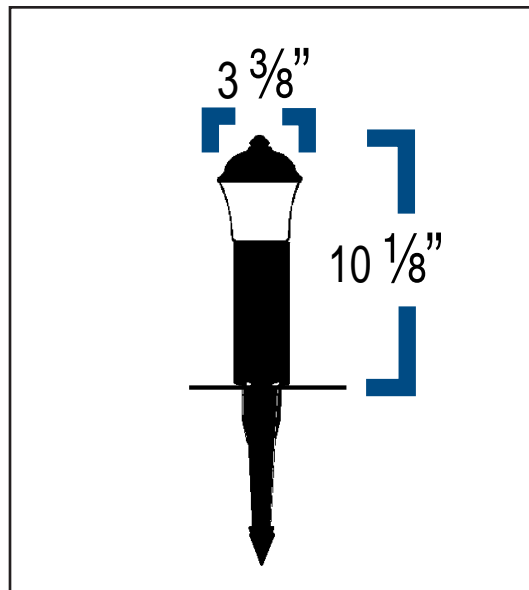

9259-12 BLACK

LAMP SELECTION:

- One 12V T5 wedge base Xenon lamp 18w max, (included).

DIMENSIONS:

- Height: 10 1/8" • Diameter: 3 3/8"

TYPICAL APPLICATIONS:

- Security lighting
- Path lighting
- Safety lighting
- Deck lighting
- Ground cover

PRODUCT FEATURES:

- Complete with shade, 6" post, polycarbonate stake, and T5 wedge base socket.
- Decorative shades emit soft, even illumination.
- Perfect for lighting steps, pathways, decks, and ground cover.
- High heat thermal, shock-resistant, etched borosilicate glass with patented twist lock bayonet base makes installation and relamping quick and easy.
- Constructed of rugged die-cast aluminum with a powder coat finish.
- Corrosion resistant finish is guaranteed for ten years.
- Select miniature Xenon or incandescent light bulbs.
- Adjustable socket for proper lamp placement.
- Supplied with 36" 16/2 AWG cable and connector for flexible electrical connection.

GENERAL TECHNICAL INFORMATION:

- Use of other manufacturers components will void the Sea Gull Lighting warranty, UL listing, and create a potential safety hazard.
- UL and CUL listed for wet locations 12V.
- US Patent # 5,249,112 -Sea Gull Lighting Products, Inc.

9259 TECHNICAL INFORMATION

INSTALLATION AND SAFETY INSTRUCTIONS FOR YOUR SAFETY

WARNING: Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.

Read and understand these instructions before installing fixture.

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference.

GROUND MOUNT


1. Make trench for stake and cable in ground.
2. Thread stake into fitting on bottom of post.
3. Run cable through stake and attach cable to supply cable with (9380) connector (included), or attach one or two supply cables to socket with wire nuts.
4. Slide socket bracket into post so that the socket bracket is level with top of post.
5. Install shade or gasket onto post -- as shade or gasket is installed, the socket will automatically slide down into post to the correct height for optimum light output.
6. Insert stake into trench and tamp ground around stake to secure in place.

INSTRUCTIONS OF ASSEMBLY AND INSTALLATION OF THE AMBIANCE™ LANDSCAPE POST.


TOOLS REQUIRED FOR INSTALLATION
(supplied by others)

1. (1) Philips screwdriver

Follow instructions supplied with transformer for cable connection.

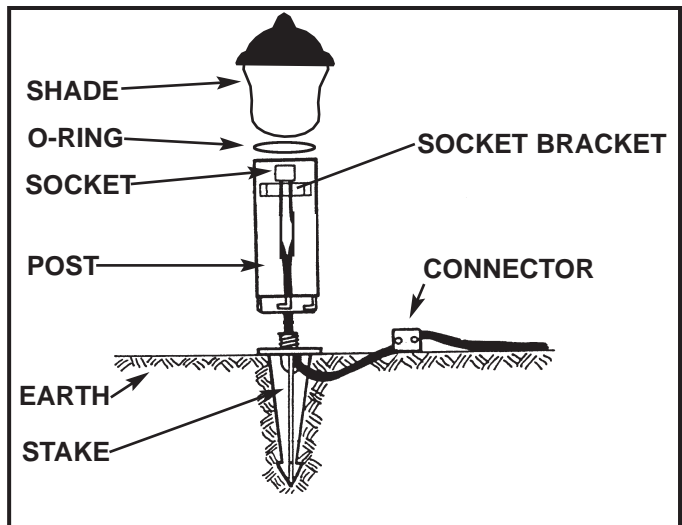

WARNING: Use of other manufacturer's components will void warranty, U.L. listing and create a potential safety hazard.

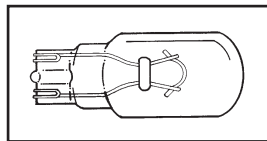

LAMPS: T5 WEDGE BASE 12V LAMP

All glass wedge base lamps are designed for long life and severe operating conditions including shock, vibration, heat, cold and moisture. With no metal base or soldered connections to loosen, break or corrode, these lamps will operate in high ambient temperatures. Xenon lamps offer long life, high intensity and white color similar to halogens.

LAMP INFORMATION

CAT #	VOLTS	WATTS RATED	WATTS CONSUMED	LIFE (HOURS)	LUMEN	COLOR (TEMP°K)	Lamp data is based on manufacturers published information recalculated at approx. 12V.
9774 Xenon	12	18	16.2	10,000	210	2,800	
9776	12	8	8	2,500	57	2,650	
9777	12	12	11.6	2,000	120	2,750	
9778	12	18	16.2	2,000	210	2,800	